


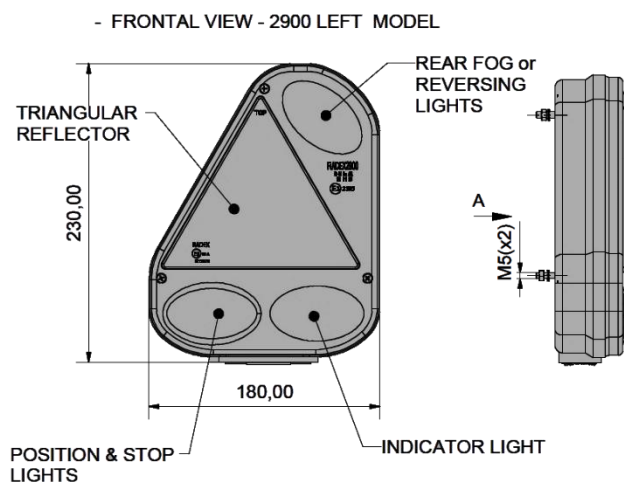

Dati tecnici Technical data Datos técnicos Données techniques Technische Daten	Tensione di alimentazione: Supply voltage:	12 Vdc	Temperatura di esercizio: Working temperature:	-20°C ~ +50°C
	Omologazione: Homologation:	ECE E3 2385 ECE E3 148R00 21293		
	Conessioni elettriche: Electrical wirings:	Connettore 5vie + 4 vie aux 5-ways connector + 4ways connector aux	IP rating:	n.d.
		Foro passacavo Cable grommet	Dimensioni: Dimensions	Approx. 180 x 230 x 63 mm
	Materiali: Materials	PP20T – PMMA - PC	Interasse di fissaggio: Fixing distance	130 mm

		Sinistro Left	Destro Right	Posizione Tail	Stop	Direzione Direction	Luce targa Nr Plate light	Retronebbia Fog light	Retromarcia Reverse light	Laterale Side marker	Catadiottro Reflector
2900/2	5 ways connector + 4	✓		✓	✓	✓		✓			✓
2900/2DK		✓		✓	✓	✓					✓
2900/4		✓		✓	✓	✓			✓		✓
2900/10		✓		✓	✓	✓	✓	✓			✓
	5 ways connector + 4ways aux	Sinistro Left	Destro Right	Posizione Tail	Stop	Direzione Direction	Luce targa Nr Plate light	Retronebbia Fog light	Retromarcia Reverse light	Laterale Side marker	Catadiottro Reflector
2900/3			✓	✓	✓	✓					✓
2900/3UK			✓	✓	✓	✓		✓			✓
2900/5			✓	✓	✓	✓			✓		✓
2900/11			✓	✓	✓	✓	✓				✓
2900/11UK			✓	✓	✓	✓	✓	✓			✓
2900/13			✓	✓	✓	✓	✓		✓		✓
	With cable grommet	Sinistro Left	Destro Right	Posizione Tail	Stop	Direzione Direction	Luce targa Nr Plate light	Retronebbia Fog light	Retromarcia Reverse light	Laterale Side marker	Catadiottro Reflector
2900/2F		✓		✓	✓	✓		✓			✓
2900/12F		✓		✓	✓	✓	✓		✓		✓
2900/10F		✓		✓	✓	✓	✓	✓			✓
2900/3F			✓	✓	✓	✓					✓
2900/5F			✓	✓	✓	✓			✓		✓
2900/11F			✓	✓	✓	✓	✓	✓			✓
2900/13F			✓	✓	✓	✓	✓		✓		✓