


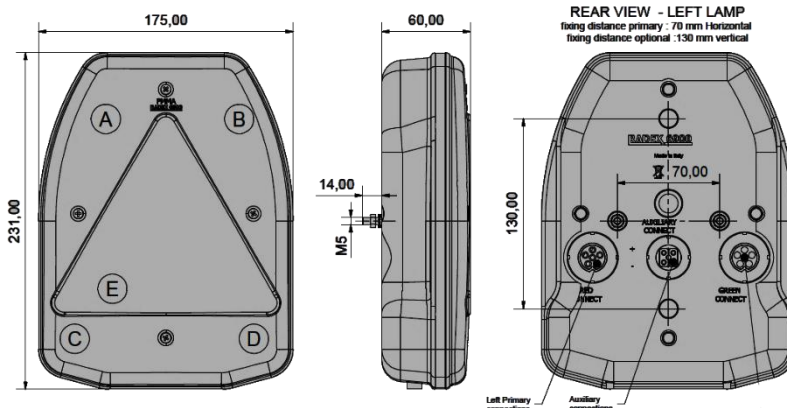

Dati tecnici Technical data Datos técnicos Données techniques Technische Daten	Tensione di alimentazione: Supply voltage:	12 Vdc	Temperatura di esercizio: Working temperature:	-20°C ~ +50°C
	Omologazione: Homologation:	ECE E3 57690	Tecnologia: Light technology	LAMPADINA BULB
	Conessioni elettriche: Electrical wirings:	Connettore 6 vie 6-ways connector + 4 ways aux	Dimensioni: Dimensions	220 x 160 x 60 mm (without end-outline)
		Foro passacavo Cable grommet		287 x 160 x 60 mm (with end-outline)
	Materiali: Material	PP20T – PMMA - PC	Interasse di fissaggio: Fixing distance	70 mm

		Sinistro Left	Destro Right	Posizione Tail	Stop	Direzione Direction	Retronebbia Fog light	Retromarcia Reverse light	Ingombro End- outline	Laterale Side marker	Luce targa Nr plate light	Lampadine Bulbs included
6900/2	5 ways connector + 4ways auxiliary connector	✓		✓	✓	✓	✓	✓				
6900/3			✓	✓	✓	✓	✓	✓				
6901/2		✓		✓	✓	✓	✓	✓	✓			
6901/3			✓	✓	✓	✓	✓	✓	✓			
6902/2		✓		✓	✓	✓	✓	✓	✓	✓		
6902/3			✓	✓	✓	✓	✓	✓	✓	✓		
6903/2		✓		✓	✓	✓	✓	✓	✓		✓	
6903/3			✓	✓	✓	✓	✓	✓	✓		✓	
6900/10		✓		✓	✓	✓	✓	✓			✓	
6900/11			✓	✓	✓	✓	✓	✓			✓	

		Sinistr o Left	Destr o Right	Posizion e Tail	Sto p	Direzion e Direction	Retronebbi a Fog light	Retromarci a Reverse light	Ingombr o End- outline	Lateral e Side marker	Luce targ a Nr plate light	Lampadin e Bulbs included
6900/2F	With cable grommet	✓		✓	✓	✓	✓	✓				
6900/3F			✓	✓	✓	✓	✓	✓				
6900/2/6 -F		✓		✓	✓	✓	✓	✓				✓
6900/3/6 -F			✓	✓	✓	✓	✓	✓				✓